



Manufactured by Adeka Corporation
Tokyo, Japan

Supplied by: **BoMetals, inc.**
concrete and masonry accessories


800-862-4835
www.bometals.com

PRODUCT DESCRIPTION:

SIZE:	15mm X 10mm (0.59" X 0.39")
PACKAGING:	25meters (82 feet per case) 10 lbs per case
PROPERTIES:	
Density	0.7mg/m ³
Tensile Strength	0.78 MPa
Elongation	350%
Volume % Change	30%
Vulcanization	Yes
Expansion Pressure	0.03 MPa
Tested by press sheet of KBA compound	
Property values are representative values and not specification values	

GENERAL DESCRIPTION:

ADEKA ULTRASEAL[®] KBA-1510FP is a chemically modified natural rubber (vulcanized) product. The manufacturing process chemically bonds a hydrophilic agent to the rubber. This permits the seal to undergo controlled expansion when exposed to moisture. This expansion capability provides a "double locking"



waterstop i.e. one from rubber's natural resilience and one from expansion pressure generated when it is exposed to water.

KBA-1510FP has excellent durability and resistance to chemical contaminants. It can perform in a wide range of solutions such as seawater or cement water. The material does not contain any toxic substance or heavy metals and is environmentally safe.

BASIC USE:


The product is designed for non-moving joints. Because of its low expansion pressure, it can be used in areas with a minimum of one inch of concrete coverage. Lower expansion pressure allows the product to be used between the wet face of the concrete and rebar provided there is a minimum of one inch of concrete coverage. Placing KBA-1510FP in this position will protect the rebar from moisture. KBA-1510FP is suitable for use between non-moving pre-cast segments where tolerances are within the limits of KBA-1510FP (KBA-1510FP must be compressed in all areas).

SAFE AND COST EFFECTIVE WATERSTOP

USE IN

- Concrete joints
- Precast structures
- Containment curbs
- Piping penetrations


Use in areas where hydrostatic head is less than 25 feet.

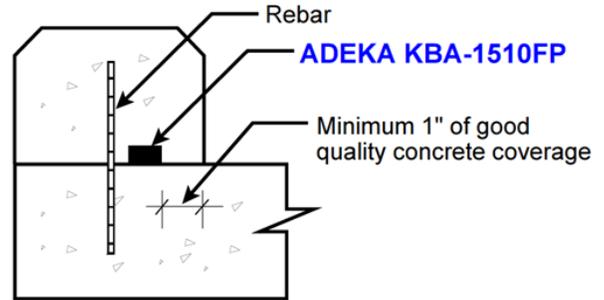

No Scale

CONTAINMENT CURB

Due to low expansion pressure, KBA-1510FP can be used as waterstop in small concrete containment curbs.

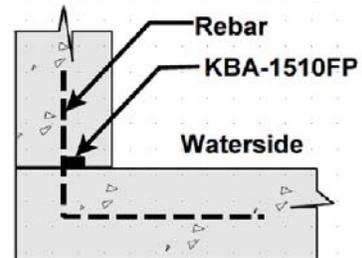

Place on waterside of rebar to help protect rebar from water-induced corrosion. Must have at minimum 1" of good quality concrete coverage. Concrete must be well consolidated around the waterstop.

BASIC INSTALLATION:

METHOD 1:

(Attaching waterstop to smooth concrete):

1. Surface of the concrete must be clean, dry and free from any loose debris.
2. Paint concrete with appropriate adhesive (3M-2141, Bostik 1142, Scotch Grip 1357, 3M Spray Adhesive 92, 3M Spray Adhesive 77 or equal). Allow adhesive to become tacky - firmly press KBA-1510FP onto adhesive.
3. Place concrete without displacing or disturbing the position of the waterstop.

METHOD 2:

(Attaching waterstop to rough concrete with P-201. This method can be used on smooth concrete as well)

1. Surface of the concrete must be clean and free from standing water.
2. Apply small bead of Adeka Ultra Seal P-201 (1/16" X 3/8"). Use enough material to fill any void between the KBA-1510FP and the concrete surface.
3. Press KBA-1510FP into the P-201 while it is still in the paste state.
4. Use a wet tool or gloved finger to remove any excess P-201 (see details).
5. Allow sufficient curing time to adhere KBA-1510FP before placing concrete (time varies by temperature - approximately 4 hours at 68 -70 degrees F.).
6. Place concrete without disturbing or displacing the waterstop.

SEE INSTALLATION GUIDE FOR MORE DETAILED INSTRUCTIONS

HYDROSTATIC HEAD:

Pressure Test:


1. Hold pressure for 3 minutes for every 0.05 MPa (7.1 psi) increase.
2. Increase pressure in 0.05MPa increments until leak is detected.
3. Discontinue test for one week.
4. Resume test with above sequence - increasing pressure by 0.10 MPa (14.2 psi)

Results:

NO LEAKAGE at 0.20 MPa (28.4 psi - approximately 57 foot hydrostatic head).


WHERE TO USE ADEKA KBA-1510FP

Replace 4" flat PVC waterstop (wall / slab : slab / wall)

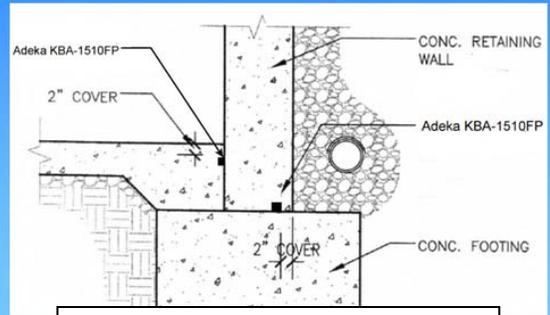

(Less than 25 foot hydrostatic head)

BETWEEN PRECAST SEGMENTS
(Less than 25 foot hydrostatic head)

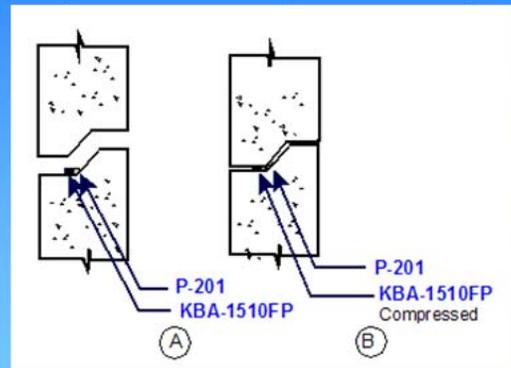

KBA-1510FP waterstop is designed for:

- * EASY installation
- * non-moving joints
- * hydrostatic head of 25 feet or less
- * 4 inch or greater concrete walls and slabs
- * place on waterside of rebar for extra protection
- * areas of minimal concrete coverage (requires just 1 inch well consolidated 4300+psi concrete)

NOTE: The information contained herein is based on our present state of knowledge and is intended to provide general notes on Adeka Waterstops and their uses. Any recommendations or suggestions, which may be made, are without guarantee, since the conditions of use are beyond our control. Furthermore, nothing contained in this publication shall be construed as a recommendation for any use that may infringe patent rights. Readers are cautioned to satisfy themselves as to the suitability of such goods for the purposes intended prior to use